

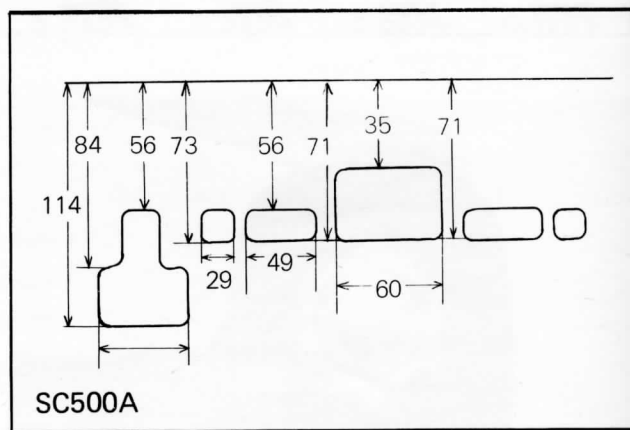
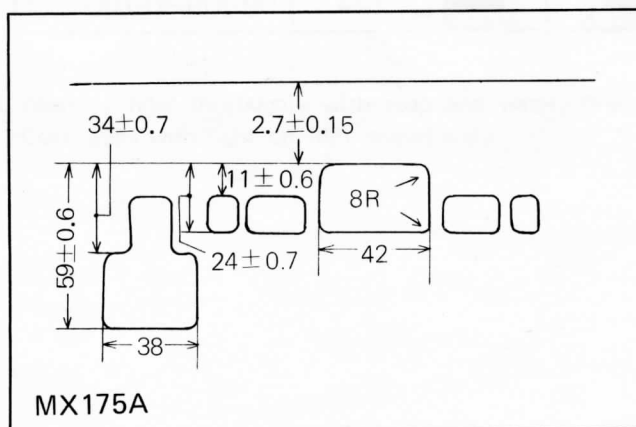
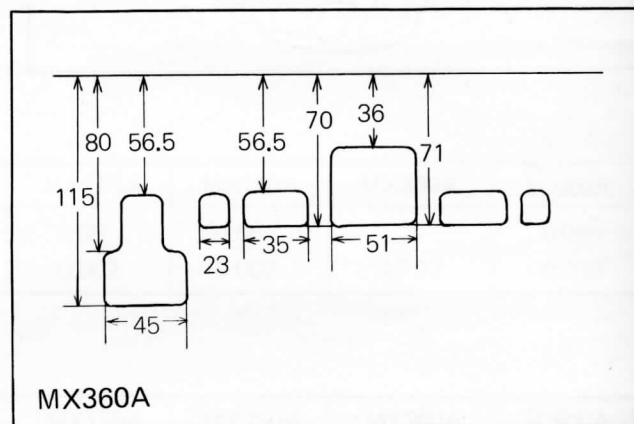
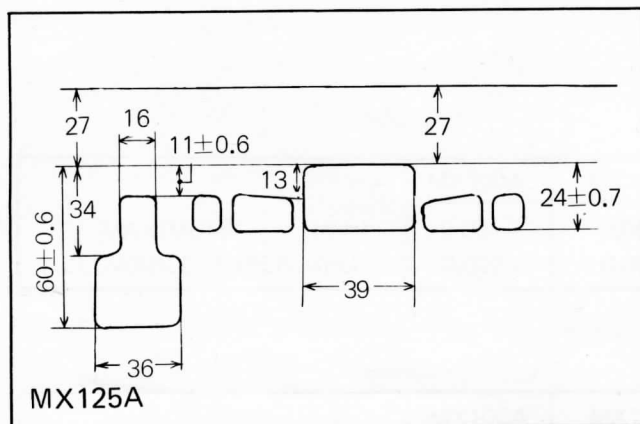


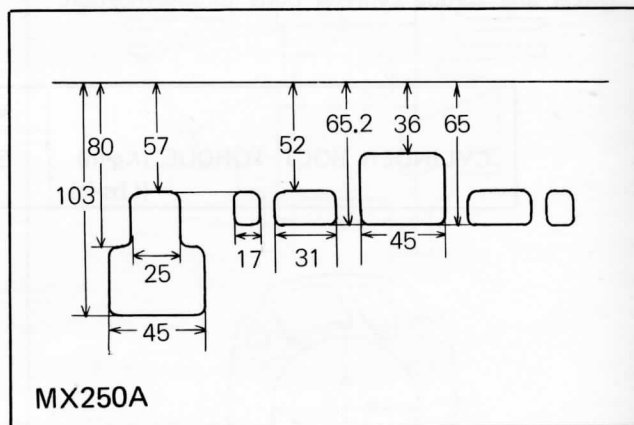

ERRATA MX series & SC500A Service Manual

PAGE	INCORRECT										CORRECT
19	ITEM	MODEL	MX100A	MX125A	MX175A	MX250A	MX360A	SC500A			
	Rear Wheel Tire Manufacturer Tire Tread Type		YOKOHAMA KNOBBY	YOKOHAMA KNOBBY	YOKOHAMA KNOBBY	YOKOHAMA KNOBBY	YOKOHAMA KNOBBY	YOKOHAMA KNOBBY	DUNLOP KNOBBY	DUNLOP KNOBBY	SC500A
20	CYLINDER	HEAD COMBUSTION CHAM- BER VOLUME (cc)	MX100A	MX125A	MX175A	MX250A	MX360A	SC500A			
			9.1±0.2	11.3±0.15	18.8±0.3	27.0±0.5	36.6±0.5	55±0.5			
24	MAXIMUM ALLOWABLE (mm) OUT-OF-ROUND	(in.)	MX100A	MX125A	MX175A	MX250A	MX360A	SC500A			
			0.01 0.0004	0.01 0.0004	0.01 0.0004	0.01 0.0004	0.01 0.0004	0.01 0.0004			
26	MAXIMUM PISTON (mm) CLEARANCE (USED) (in.)	(in.)	MX100A	MX125A	MX175A	MX250A	MX360A	SC500A			
			0.1 0.039	0.1 0.039	0.1 0.039	0.1 0.039	0.1 0.039	0.1 0.039			
31	MAXIMUM PISTON (mm) CLEARANCE (USED) (in.)	(in.)	MX100A	MX125A	MX175A	MX250A	MX360A	SC500A			
			0.1 0.004	0.1 0.004	0.1 0.004	0.1 0.004	0.1 0.004	0.1 0.004			

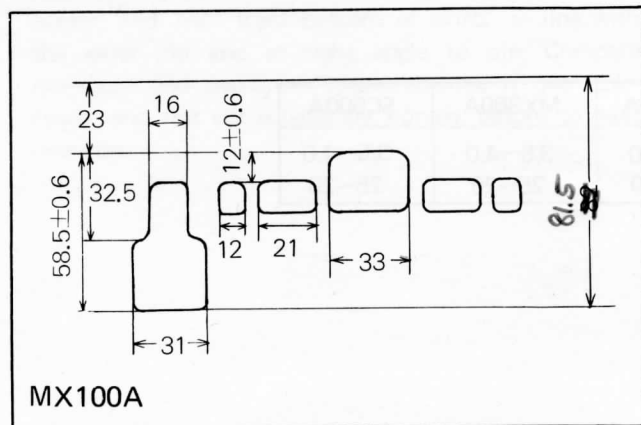